



SCM-DL-RGBW

Specs:

Power consumption: 4 watts,
250mA at 12V, 125mw at 24V

Features:

Brightness control: Brightness control with standard on/off switch

Shadow-NET enabled: Full color and brightness control with optional Shadow-Net enabled controller

Power toggle color Change: Turn the power and off to change colors.

Installation Instruction:

Drill 1-1/4" hole

Mount the retainer ring with the three screws provided

Connect the wiring

Put a 1/8" size ball of silicone sealant over each screw head

Gently push the light housing onto the retaining ring and rotate it until it drops into place

Push more firmly to seat the light into the retainer.

Operation:

When power is applied to the SCM-Down Light, the brightness slowly ramps up to full power over 8 seconds.

If the power switch is toggled on/ off quickly within this ramp up period, this will program this brightness level until the light is reset. To reset the light, turn the lights off for 10 seconds.

To toggle to another color, simply turn the power off and then back on again within 2 seconds.

The color rotation will be White, Blue,
Red, Green Aqua, Blue Violet, Violet,
Magenta, Yellow, Purple, Orange,
Green Yellow.



SCM-DL-RGBW

Specs:

Power consumption: 4 watts,
250mA at 12V, 125mw at 24V

Features:

Brightness control: Brightness control with standard on/off switch

Shadow-NET enabled: Full color and brightness control with optional Shadow-Net enabled controller

Power toggle color Change: Turn the power and off to change colors.

Installation Instruction:

Drill 1-1/4" hole

Mount the retainer ring with the three screws provided

Connect the wiring

Put a 1/8" size ball of silicone sealant over each screw head

Gently push the light housing onto the retaining ring and rotate it until it drops into place

Push more firmly to seat the light into the retainer.

Operation:


When power is applied to the SCM-Down Light, the brightness slowly ramps up to full power over 8 seconds.

If the power switch is toggled on/ off quickly within this ramp up period, this will program this brightness level until the light is reset. To reset the light, turn the lights off for 10 seconds.

To toggle to another color, simply turn the power off and then back on again within 2 seconds.


The color rotation will be White, Blue,
Red, Green Aqua, Blue Violet, Violet,
Magenta, Yellow, Purple, Orange,
Green Yellow.

WARNING! Do Not Use ACETONE
For Cleaning. Use Alcohol and Soft Cloth.

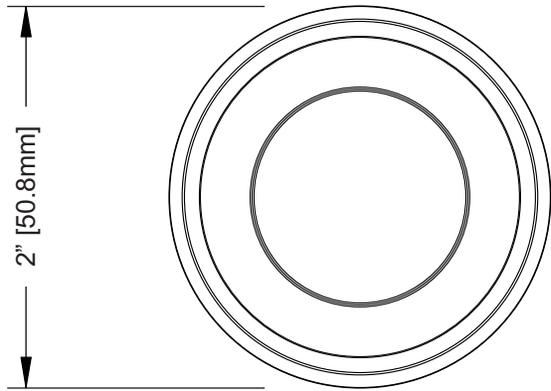


Top View

Height

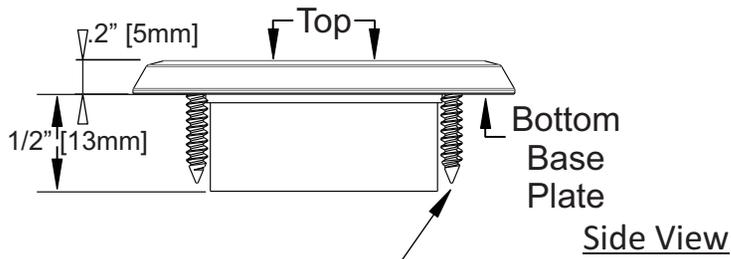

Side View

#4 Screw Size
1/2" [12.5mm]
316 Stainless Steel
Phillips Rounded Head
Screws

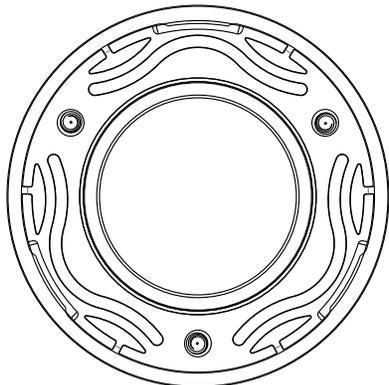


Bottom View

SCM-DL (6/17)

Scale 1:1 (If in doubt ask)


SCM-DL
Installation Diagram

WARNING! Do Not Use ACETONE
For Cleaning. Use Alcohol and Soft Cloth.

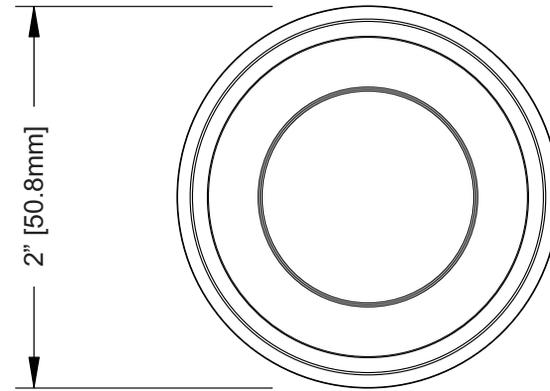


Top View

Height

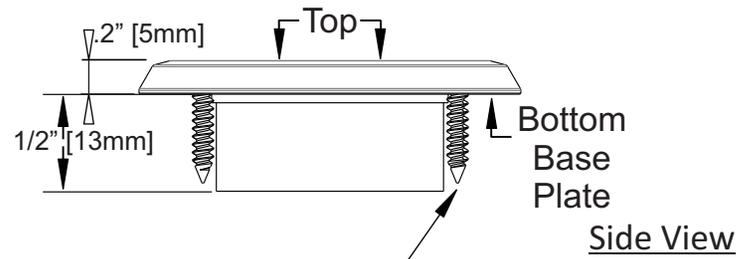

Side View

#4 Screw Size
1/2" [12.5mm]
316 Stainless Steel
Phillips Rounded Head
Screws

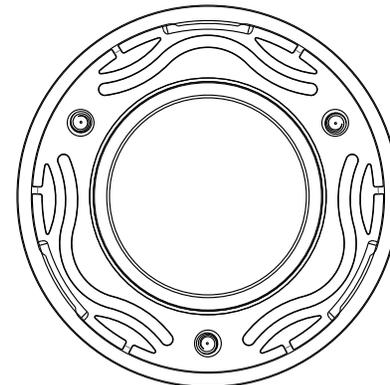

Bottom View

SCM-DL (6/17)

Scale 1:1 (If in doubt ask)

SCM-DL
Installation Diagram