

# SCM-DLX-WBR

WHITE, BLUE AND RED DOWN LIGHT





## ▶ OPERATION

- When power is applied to the light, the brightness slowly ramps up to full power over approximately 3 seconds
- Toggle power during ramp up to set brightness
- Subsequent power toggles will toggle from blue to white to red
- To reset the light, turn off for 10 seconds

## ▶ INSTALLATION

- Drill 2" hole in desired mounting location
- Mount the retainer clip with the provided #4 pan head screws
- Verify the clip is flat on the mounting surface

**Available Color:** White

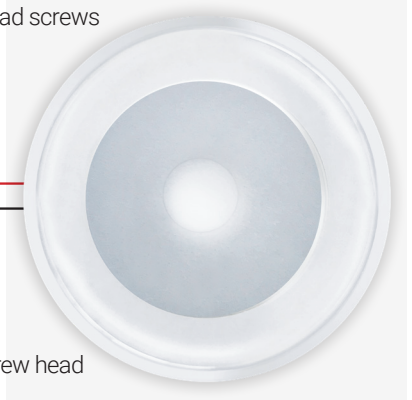

- Put a 1/8" size ball of silicone sealant over each screw head
- Connect power and ground wires
- Gently push the light housing onto the retaining ring and rotate until it drops (clicks) firmly into place

## ▶ SPECIFICATIONS

- Power consumption: 3 Watts, 250mA at 12V, 125mw at 24V
- 10-30V DC input
- IP67 (waterproof)
- Borosilicate glass window



Designed & Manufactured  
in Clearwater, FL

© 2021 Shadow-Caster® LEDs. All Right Reserved.

Shadow-Caster® LED Lighting | 2060 Calumet Street | Clearwater, FL 33765

p: +1 727.474.2877

e: [info@shadow-caster.com](mailto:info@shadow-caster.com)

w: [shadow-caster.com](http://shadow-caster.com)

## SCM-DLX-WBR


WHITE, BLUE AND RED DOWN LIGHT




### WARNING!

Do not use **Acetone** for cleaning. Use alcohol and soft cloth.


TOP VIEW

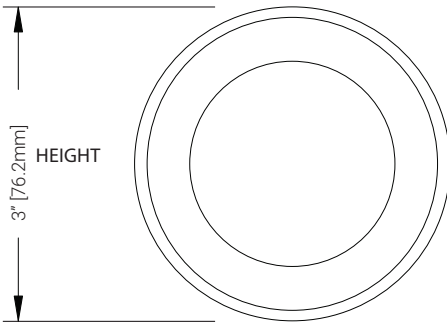


BOTTOM VIEW



### INSTALLATION DIAGRAMS

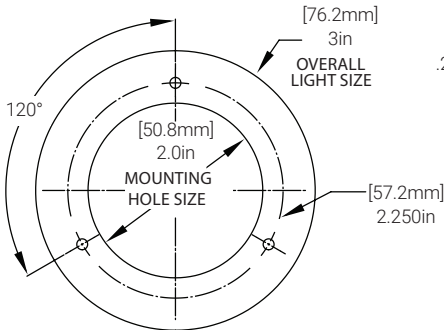

SIDE VIEW

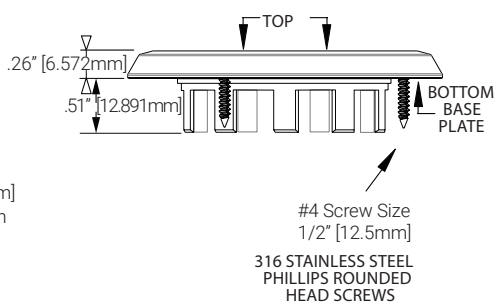

Designed & Manufactured  
in Clearwater, FL

© 2021 Shadow-Caster® LEDs. All Right Reserved.

Shadow-Caster® LED Lighting | 2060 Calumet Street | Clearwater, FL 33765

p: +1 727.474.2877 e: info@shadow-caster.com w: shadow-caster.com