

Standard Layout

SCM-PD4CH with SCM-SWITCH-0/0/MOMENTARY
& SCR-24-CC Underwater Lights



OPERATION

Control the power and push button modes remotely through the SCM-SWITCH-0/0/MOMENTARY switch.


SCM-PD4CH provides four circuits of up to 10 amps each with built in Over Current Protection (OCP).

A blue Shadow-Caster logo backlight indicates power is on.

Four channel LEDs illuminate green when output is good. Red LEDs indicate an over-current fault.

RECOMMENDED WIRE GAUGES

Scan the QR code or click [here](#) to view our recommended wire gauge chart.

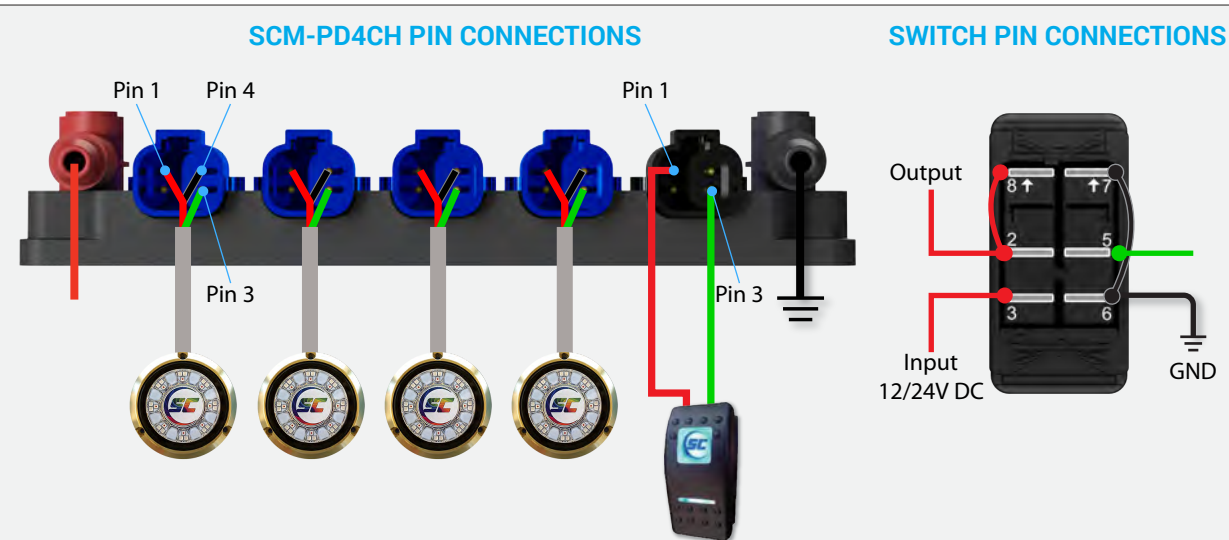

| Channel Outputs (Blue) Required mating connector DT06-4S | Connection |
|---|---------------------------|
| Pin 1 | Red +12V out (use) |
| Pin 2 | Unused |
| Pin 3 | Green Push Button Control |
| Pin 4 | Ground |

| Input Connector (Black) Required mating connector DT06-4S | Connection |
|--|--------------------------------------|
| Pin 1 | Turn On (input) |
| Pin 2 | Unused |
| Pin 3 | Green Push Button Control |
| Pin 4 | Jumper with Pin 1 to power SCM-PD4CH |

