
4 POSITION POWER CONTROL BOX



DESCRIPTION

The Shadow-Caster™ 4 Channel Power Distribution module is designed to offer a convenient way to distribute power to 4 underwater lights, and provide individual light over current protection in a convenient IP67 module. Each output channel is rated for 15 amps, and has its own 4 pin DT waterproof connector.


Green light indicates power output, Red light indicates over current condition, and needs to be reset

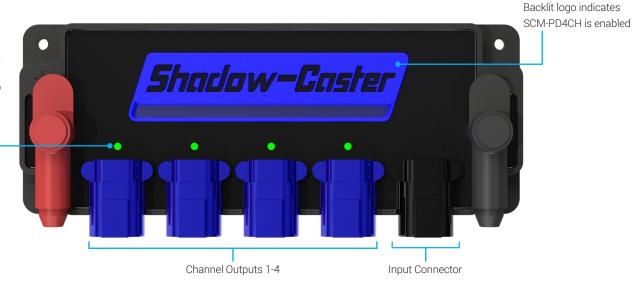

USE

Each channel output 1-4 is current protected at 15 amps. If this load is exceeded, the output channel will turn off, and the channel status indicator light will turn red to indicate a fault condition. To reset, remove the overload condition, and cycle the power switch.

PIN OUTS

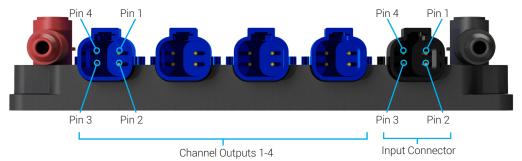

Mating connector (AT06-4S Blue)

3	
Channel Outputs	Connection
Pin 1	Ground
Pin 2	Yellow - Shadow-NET™ High
Pin 3	Orange - Shadow-NET™ Low
Pin 4	Red +12V out (use)

Mating Connector (AT06-4S)

Input Connector	Connection
Pin 1	Power 20mA (output)
Pin 2	Yellow - Shadow-NET™ High
Pin 3	Orange - Shadow-NET™ Low
Pin 4	Turn On (input)

WIRE GAUGE REQUIREMENTS

Sufficient wire gauge is critical. Insufficient gauging can cause voltage drop which leads to over current conditions. Scan the QR Code or click **here** to view our recommended wire gauge chart.





4 POSITION POWER CONTROL BOX



SCHEMATIC

For use in Shadow-NET™ installations:

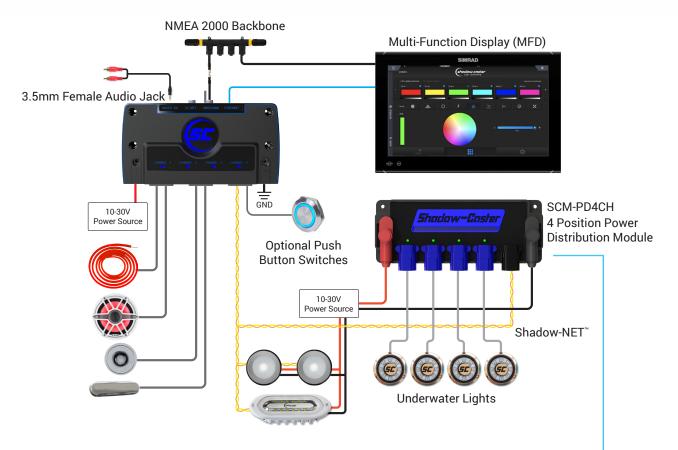

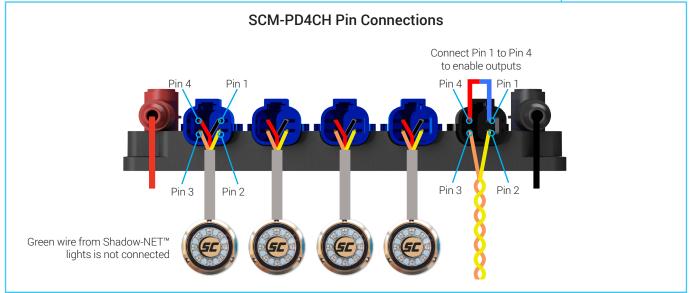


4 POSITION POWER CONTROL BOX



SCHEMATIC

For use in power toggle control applications:



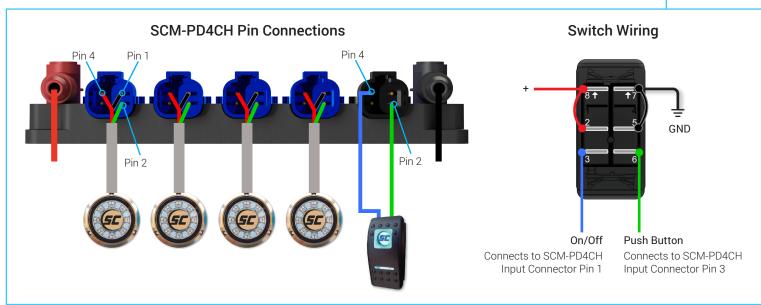

4 POSITION POWER CONTROL BOX



DIMENSIONS

